



Installation of Bi-Lock's New Generation QCC Plug


inside view

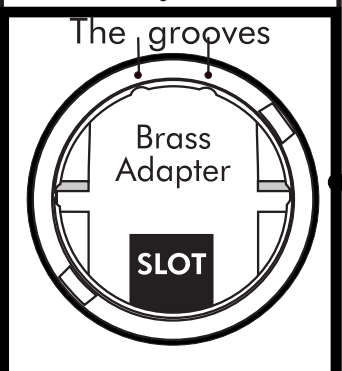


BiLock New Generation 1999-2016

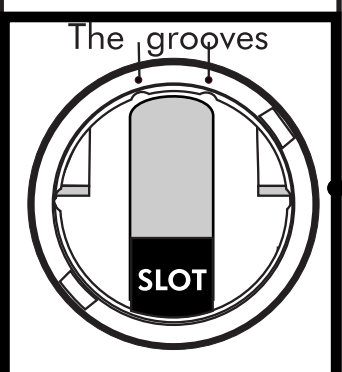


BiLock New Generation 2016-2019

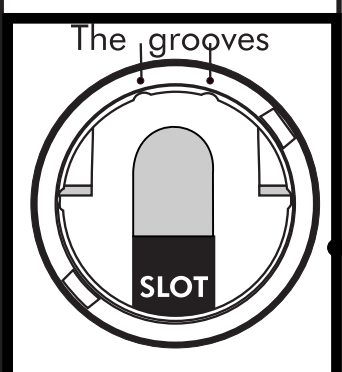

BiLock New Generation 2019>

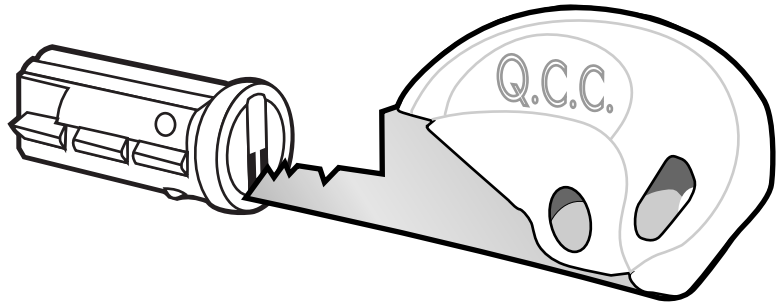


1

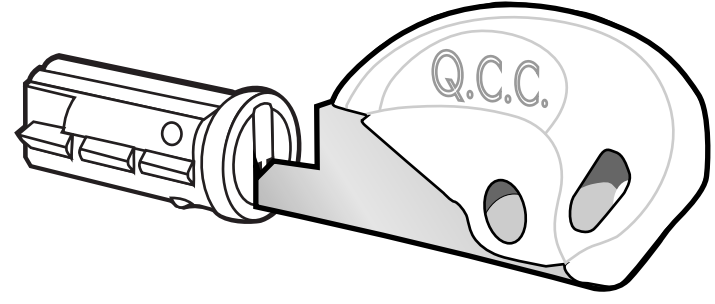


2

Always keep the plug, the adapter and the body in the right position!

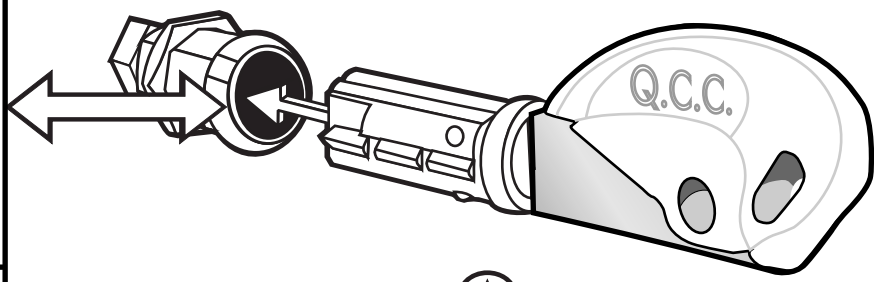


3

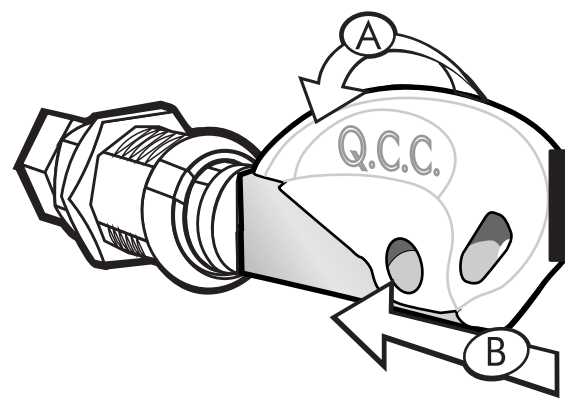

**A. Turn the key to either 1 O'clock or 11 O'clock position.
B. Then push the plug into position**

4

Lubricate with WD-40 after installation

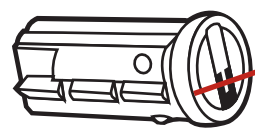


5



CASINO LOCKING SYSTEMS

Bi-Lock Instructions

How to Pull the Plug

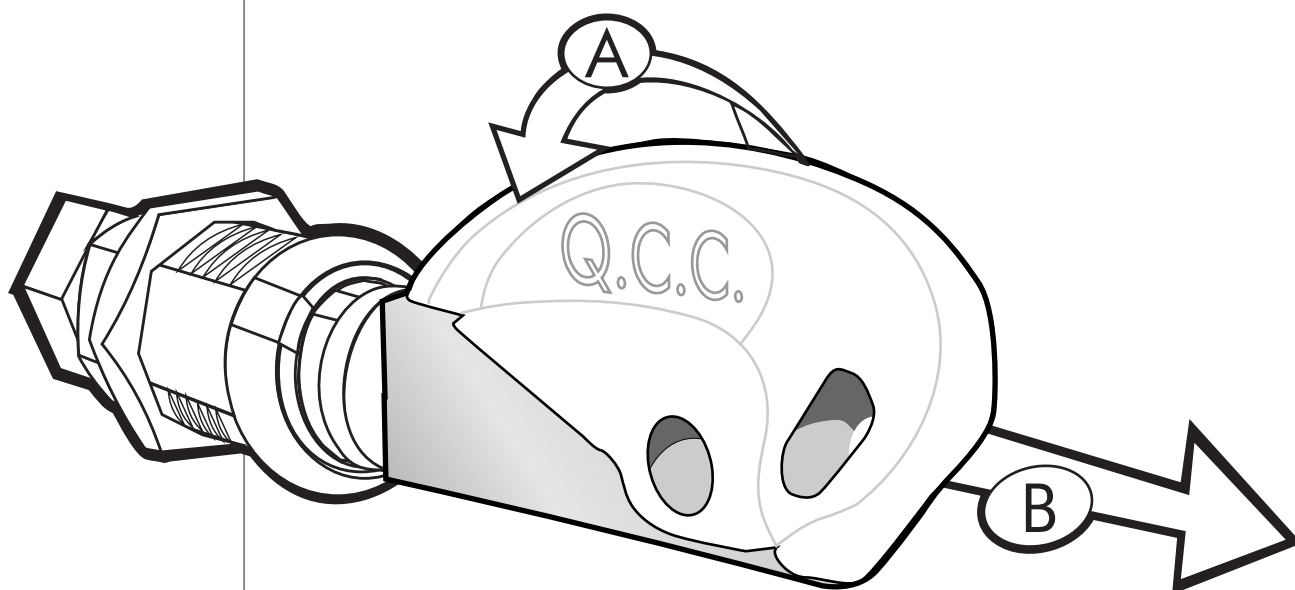

- A. Turn the key to either 1 O'clock or 11 O'clock position.
- B. Then pull the key including the plug



CASINO LOCKING SYSTEMS

Reinier Rondhorstdijk 32 - 3059 SM Rotterdam - The Netherlands - Tel.: 31(0)10 - 228 16 51

E-mail: info@casinolock.com - Internet: www.casinolock.com